

PROJECT NAME:	
LOCATION:	
ITEM:	QTY:
MODEL:	

SRMG SERIES MANUAL GRIDDLES

Sierra Griddles feature all-stainless steel construction, the SRMG Series has a powerful capacity of 23,000 BTU per each "U" burner. The griddle feature a modern look and design, form and function fit for the most demanding kitchens at an affordable price. All with the ease of modular customization.



STANDARD FEATURES


- All non-ferrous stainless steel construction: interior, exterior, front, sides, landing ledge and valve controls
- Heavy gauge welded front frame
- "U" shaped burners rated at 23,000 BTU/hr. Located every 12" for even heat distribution on griddle surface
- 4" wide grease trough for easy cleaning
- Removable Crumb tray for quick and easy cleaning
- One stainless steel standing pilot for each flute for instant ignition

- Aeration baffles between "U" shaped burners to provide uniform surface temperature
- Highly polished 3/4" thick steel griddle plates
- Compact design for counter top use
- Adjustable Stainless steel feet
- Features a full 6" landing edge for increased plate stability
- The SRMG is shipped from the factory, ready for natural gas installation. An LP conversion kit is included with each unit





TECHNICAL DRAWINGS

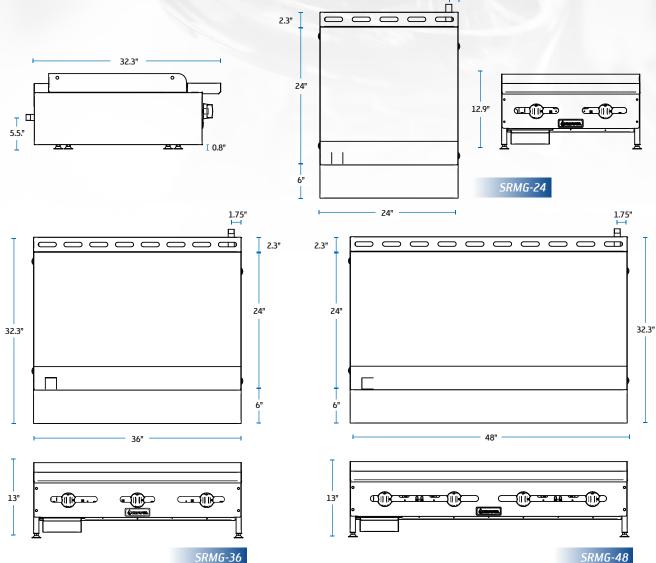

SPECIFICATIONS

MODEL NUMBER	EXTERNAL DIMENSIONS (WxDxH)	NUMBER OF BURNERS	BTU'S PER BURNER	TOTAL BTU	NET WEIGHT	SHIPPING WEIGHT
SRMG-24	24" X 32.3" X 12.9"	2	23,000	46,000	143 LBS	174 LBS
SRMG-36	36" X 32.3" X 13"	3	23,000	69,000	198 LBS	242 LBS
SRMG-48	48" X 32.3" X 13"	4	23,000	92,000	253 LBS	304 LBS

c Ustreo us
Intertek



Warranty: 12 months parts & labor.

Gas Connection: 3/4" NPT on the right hand rear of the appliance. The pressure regulator (supplied) is to be connected here by the installer. **Gas pressure:** 5"W.C. - Natural Gas | 10"W.C. - Propane

Combustible Clearances: For use in non-combustible locations | Non-combustible Clearances: 0 inches sides, 0 inches rear Specify type of gas and altitude, if over 2,000 feet, when ordering.

SIERRA RANGE is a registered trademark of MVP Group.

Due to continuing product development, to ensure best possible performance, the specifications are subject to change without prior notice.

